

COL-QSFP-40G-SR4 Optical Transceiver

QSFP+ 40G SR4 400m Transceiver, With Diagnostic Monitoring

Features

- ◆ 4 channels full-duplex transceiver modules
- ◆ Transmission data rate up to 10.5Gbps per channel
- ◆ 4 channels 850nm VCSEL array
- ◆ 4 channels PIN photo detector array
- ◆ Hot-pluggable QSFP form factor
- ◆ Maximum link length of 300m on OM3 Multimode Fiber(MMF) and 400m on OM4 MMF
- ◆ Single 1X12 MPO connector receptacle Hot-pluggable electrical interface
- ◆ 0–70°C operating temp
- ◆ Low power consumption < 1.5W
- ◆ RoHS6 compliant (lead free)

Applications

- ◆ 40G Ethernet and OTU3
- ◆ Datacom/Telecom switch & router connections
- ◆ Data Aggregation and Backplane Applications
- ◆ Proprietary Protocol and Density Applications
- ◆ Infiniband transmission at 4ch SDR, DDR and QDR

Description

The QSFP+ 40G-SR4-400m module is a highly integrated 4x10G transceiver focused on reach, bandwidth, density and cost for highport-count 40G systems, and client-side 40G interfaces. Each lane can operate at 10.3125Gbps up to 300m using OM3 fiber or 400m using OM4 fiber. These modules are designed to operate over multimode fiber systems using a nominal wavelength of 850nm. The electrical interface uses a 38-contact edge type connector. The optical interface uses an 12-fiber MTP/MPO connector.

OPTICAL TRANSMITTER PERFORMANCE

Parameter	Symbol	Min	Typical	Max	Unit
Signaling Speed per Lane			10.5		Gb/s
Center Wavelength	λ_c	840	850	860	nm
RMS spectral width	$\Delta\lambda$	-		0.4	nm
Average Launch Power per Lane	TXPx	-7.5		0.5	dBm
Transmit OMA per Lane	TxOMA	-2.5		3	dBm
Difference in launch power between any two lanes (OMA)	DPx			4	dB
Peak Power per Lane	PPx			4	dBm
Launch Power [OMA] minus TDP per Lane	P-TDP	-6.5			dBm
Extinction Ratio	ER	3			dB
Optical Return Loss Tolerance	ORL			12	dB
Encircled Flux	FLX		> 86% at 19 μ m < 30% at 4.5 μ m		dBm
Average launch power of OFF transmitter, each lane				-30	dBm
Transmitter eye mask definition {X1, X2, X3, Y1, Y2, Y3}		{0.23, 0.34, 0.43, 0.27, 0.35, 0.4}			

OPTICAL RECEIVER PERFORMANCE

Parameter	Symbol	Min	Typical	Max	Unit
Signaling Speed per Lane			10.5		Gb/s
Center Wavelength	λ_c	840	850	860	nm
Damage Threshold	DT	3.4			dBm
Average receive power, each lane	RXPx	-9.9		2.4	dbm
Unstressed Sensitivity (OMA) at 10 x 10-12BER	RxOMA	-	-	3	dBm
Unstressed Receiver Sensitivity (OMA) per Lane	URS	-		-11.1	dBm
Stressed Receiver Sensitivity (OMA) per Lane	SRS			-7.5	dBm
Vertical eye closure penalty, each lane	VECP			1.9	dB
Stressed eye J2 jitter, per Lane				0.3	UI
Stressed eye J9 jitter, per Lane				0.47	UI
OMA of each aggressor lane				-0.4	dBm

Recommended operating environment

Recommended Operating Environment specifies parameters for which the electrical and optical characteristics hold unless otherwise noted.


Parameter	Symbol	Min	Typical	Max	Unit
Power Supply Voltage	V _{CC}	3.135	3.300	3.465	V
Operating Case Temperature	T _c	0	25	70	°C

Pin definition

Pin	Symbol	Name/Description
1	GND	Ground
2	Tx2n	Transmitter Inverted Data Input
3	Tx2p	Transmitter Non-Inverted Data Input
4	GND	Ground
5	Tx4n	Transmitter Inverted Data Input
6	Tx4p	Transmitter Non-Inverted Data Input
7	GND	Ground
8	ModSelL	Module Select
9	ResetL	Module Reset
10	Vcc Rx	+3.3 V Power supply receiver
11	SCL	2-wire serial interface clock
12	SDA	2-wire serial interface data
13	GND	Ground
14	Rx3p	Receiver Non-Inverted Data Output
15	Rx3n	Receiver Inverted Data Output
16	GND	Ground
17	Rx1p	Receiver Non-Inverted Data Output
18	Rx1n	Receiver Inverted Data Output
19	GND	Ground
20	GND	Ground
21	Rx2n	Receiver Inverted Data Output
22	Rx2p	Receiver Non-Inverted Data Output
23	GND	Ground
24	Rx4n	Receiver Inverted Data Output
25	Rx4p	Receiver Non-Inverted Data Output
26	GND	Ground
27	ModPrsL	Module Present
28	IntL	Interrupt


29	Vcc Tx	+3.3 V Power supply transmitter
30	Vcc1	+3.3 V Power Supply
31	LPMode	Low Power Mode
32	GND	Ground
33	Tx3p	Transmitter Non-Inverted Data Input
34	Tx3n	Transmitter Inverted Data Input
35	GND	Ground
36	Tx1p	Transmitter Non-Inverted Data Input
37	Tx1n	Transmitter Inverted Data Input
38	GND	Ground

Pin Descriptions

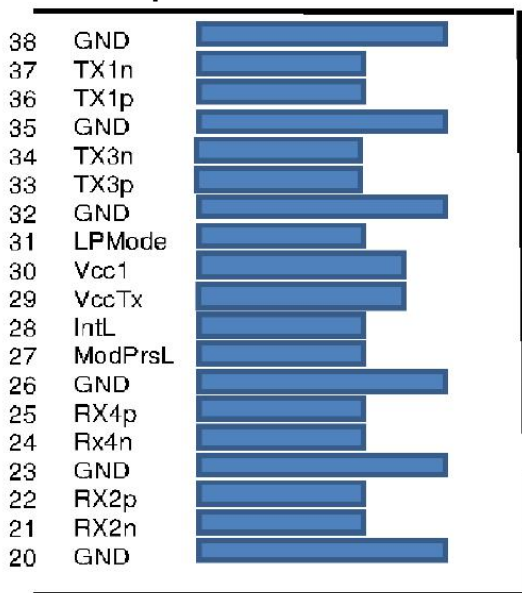

Top Side
Viewed From Top

Module Card Edge

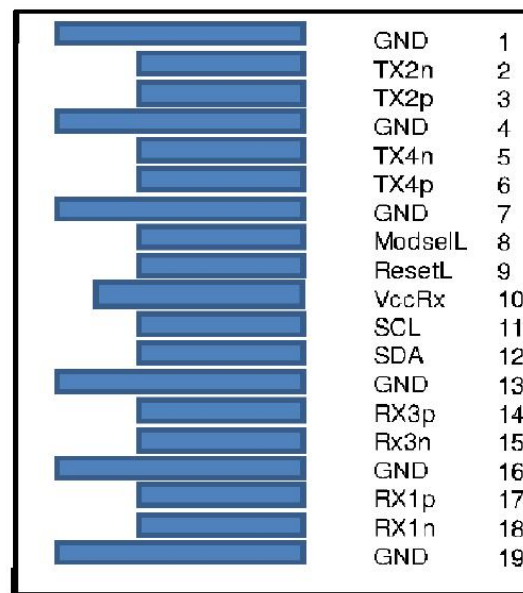

Bottom Side
Viewed From Bottom

Ordering information

Part Number	Product Description
COL-QSFP-40G-SR4	QSFP+ 40G SR4 400m 0°C ~ +70°C

Important Notice

Performance figures, data and any illustrative material provided in this data sheet are typical and must be specifically confirmed in writing by coptolink before they become applicable to any particular order or contract. In accordance with the coptolink policy of continuous improvement specifications may change without notice. The publication of information in this data sheet does not imply freedom from patent or other protective rights of coptolink or others. Further details are available from any coptolink sales representative.

sales@coptolink.com
www.coptolink.com